


MINI hadicové spony



W1



W4



Mini sponky jsou navrženy tak, aby dokonale utěsnily malé průměry hadic.

Sponky nejsou perforované, tím se eliminuje riziko poškození hadic a všechny velikosti tak uzavírají dokonalý kruh.

No.	Rozměr mm	Síla pásku	No.	Rozměr mm	Síla pásku
M08	6-8	0.6	M22	20-22	0.7
M09	7-9	0.6	M23	21-23	0.7
M10	8-10	0.6	M24	22-24	0.7
M11	9-11	0.6	M25	23-25	0.7
M12	10-12	0.6	M27	25-27	0.7
M13	11-13	0.6	M28	26-28	0.7
M14	12-14	0.6	M29	27-29	0.7
M15	13-15	0.6	M30	28-30	0.7
M16	14-16	0.6	M31	29-31	0.7
M17	15-17	0.6	M32	30-32	0.7
M18	16-18	0.6	M33	31-33	0.7
M19	17-19	0.6	M34	32-34	0.7
M20	18-20	0.6	M48	46-48	0.7
M21	19-21	0.6			



MINI sponky
"French"

www.exvalos.cz

Pružné sponky

Radiálně působící utahovací síla stačí k tomu, aby byla zajištěna spolehlivá těsnost i při nízkých teplotách.




pozinkované



DACROMET



černé povrstvení

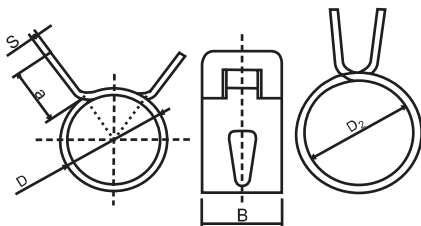

No.	D	S(mm)	B(mm)	D ₁	D ₂	No.	D	S(mm)	B(mm)	D ₁	D ₂
S7.0	7.0	0.6	6.0	7.60	8.30	S15.0	15.0	1.0	10.0	16.20	17.90
S8.0	8.0			8.60	9.50	S15.5	15.5			16.70	18.40
S8.5	8.5			9.20	10.20	S16.0	16.0			17.30	19.10
S9.0	9.0	9.70	10.70	S16.5	16.5	17.90	19.70				
S9.5	9.5	10.30	11.30	S17.0	17.0	18.40	20.20				
S10.0	10.0	10.80	11.90	S17.5	17.5	18.90	20.90				
S10.5	10.5	11.40	12.50	S18.0	18.0	19.40	21.40				
S11.0	11.0	11.90	13.10	S18.5	18.5	20.00	22.10				
S11.5	11.5	12.40	13.70	S19.0	19.0	20.50	22.60				
S12.0	12.0	13.00	14.30	S19.5	19.5	21.10	23.30				
S12.5	12.5	13.50	14.90	S20.0	20.0	21.60	23.80				
S13.0	13.0	14.00	15.50	S20.5	20.5	22.20	24.40				
S13.5	13.5	14.60	16.10	S21.0	21.0	22.70	25.00				
S14.0	14.0	15.10	16.70	S23.0	23.0	24.80	27.40				
S14.5	14.5	15.70	17.30	S24.0	24.0	25.90	28.50				
				S25.0	25.0	27.00	29.80				

D dodávané průměry

S síla

B šířka pásku

D₁ rozměr spon

D₂ maximální průměr otevření

Kontakt:

Tel./fax: +420 465 323 140

E-mail: exvalos@exvalos.cz

www.exvalos.cz